

E5


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>G01R 33/34</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 96/38741</b> <b>(43) International Publication Date:</b> 5 December 1996 (05.12.96)
<b>(21) International Application Number:</b> PCT/GB96/01316 <b>(22) International Filing Date:</b> 3 June 1996 (03.06.96)  <b>(30) Priority Data:</b> 9511101.9                      1 June 1995 (01.06.95)                      GB  <b>(71) Applicant (for all designated States except US):</b> BRITISH TECHNOLOGY GROUP LIMITED [GB/GB]; 101 Newington Causeway, London SE1 6BU (GB).  <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> YEUNG, David, Ka, Wai [GB/GB]; F20, 2nd floor, Hing Wo H'ouse, Po Nga Court, Tai Po (HK).  <b>(74) Agent:</b> BUTTRICK, Richard; British Technology Group Limited, Patents Dept., 101 Newington Causeway, London SE1 6BU (GB).		<b>(81) Designated States:</b> GB, IL, JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** MAGNETIC COIL**(57) Abstract**

A birdcage resonator coil for use, e.g., in a magnetic resonance system, has a pair of parallel, conducting end rings (20, 22; 30, 32) with N conductors (24; 34) connected between them and spaced at intervals of  $2\pi/N$ , the conductors curving outwards along elliptical paths. The elliptical-curving conductors may be associated in pairs (34A, B, C, D).

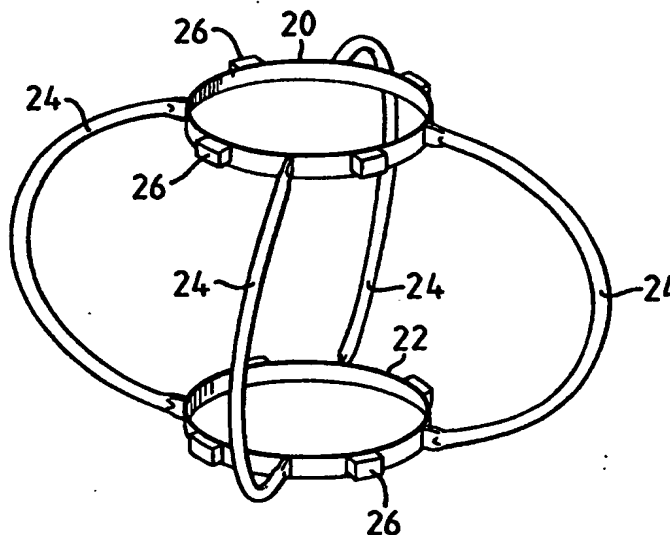

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

WO 96/38741

PCT/GB96/01316

### MAGNETIC COIL

This invention relates to a magnetic coil for transmitting or receiving a magnetic field, for example the radio-frequency magnetic field in a magnetic resonance system, and relates especially to magnetic coils known as birdcage resonators.

The term magnetic resonance systems means magnetic resonance imaging (MRI) and magnetic resonance spectroscopy (MRS) which in this specification will be referred to as MR systems. In such systems, a material under investigation is exposed to a static magnetic field and a radio-frequency magnetic field to generate magnetic resonance in the material, and a property of the magnetic resonance is detected which is dependent on the structure of the material and of the environment of nuclei within that material.

10 In a paper by C.E. Hayes *et al.*, in the Journal of Magnetic Resonance, Volume 63, 1985, pages 622-628, an r.f. coil known as a birdcage resonator is described, comprising two circular conducting end rings connected by straight parallel conductors, known as "legs". The birdcage resonator is suitable for use in MR systems in which the static magnetic field is parallel to the magnetic bore, i.e. horizontal. The r.f. field produced by  
15 a birdcage resonator is highly homogeneous, an essential factor in MR systems, and the resonator can be used in quadrature to improve the sensitivity of the MR system, and it can also be dual-tuned to perform simultaneous measurements on two types of nuclei within the material under test.

However for horizontal magnet bore MR systems with a vertical static magnetic  
20 field, the birdcage cannot be used in quadrature. In addition, if the birdcage in the design as described by Hayes is used in an MR system with a horizontal bore, access to the sample/patient is severely limited by the legs on the resonator.

Solenoidal coils are commonly used for vertical field MR systems as whole-body and head coils. However, unlike birdcage resonators, they cannot be driven in quadrature.  
25 Further, their cylindrical structure is inherently claustrophobic, a major disadvantage for whole body MR systems. Both the solenoidal and the birdcage coil have one common disadvantage: they offer very limited side access to the patient/sample.

An alternative coil, known as a cross-ellipse coil, is described in UK Patent No. 2144918, National Research Development Corporation, which has an advantageously

WO 96/38741

PCT/GB96/01316

open structure, thus minimising claustrophobic effects, but such a coil is inherently less sensitive and less efficient than a birdcage resonator.

In DE 3347597, Philips, Figure 15 discloses a resonator having a barrel-shape, but the precise shape of the curve is not specified, and the resonator is not a birdcage resonator.

5 According to the invention a magnetic coil comprises a pair of parallel conducting end rings, and connected between the end rings a number N of conductors spaced around the end rings at intervals of  $\frac{2\pi}{N}$ , the conductors curving outwards between the end rings along elliptical paths.

In one arrangement the planes in which the elliptical paths lie are radial to the end  
10 rings. Optionally there are four conductors spaced at 90° intervals around the end rings.

In an alternative arrangement the conductors are associated in pairs, each pair of conductors curving outwards from the rings along parallel elliptical paths, the planes in which the elliptical paths lie being parallel to the radius to each end ring intermediate between the connection points of that pair of conductors to the ring. Optionally there are  
15 eight conductors spaced at 45° intervals around the end rings and arranged as four pairs.

Preferably there is further provided a number N of capacitors in each end ring, connected between adjacent conductors whereby a high-pass birdcage resonator is provided.

Alternatively there is further provided a number N of capacitors connected one in  
20 each conductor of the magnetic coil, whereby a low-pass birdcage-type resonator is provided.

In a third option, there are N capacitors in each end ring, connected between adjacent conductors, and there are a further N capacitors connected one in each conductor, whereby a bandstop birdcage-type resonator is provided.

25 An MR system may comprise a magnet having a horizontal bore and providing a static magnetic field, and a magnetic coil according to the invention arranged with its end rings in horizontal planes within the horizontal bore. The magnetic coil may be arranged either to generate or to detect a magnetic field at radio frequencies. The static magnetic field may be either horizontal or vertical.

WO 96/38741

PCT/GB96/01316

It is an advantage of such an MR system that access to the sample/patient within the bore is good as the coil according to the invention has essentially an open structure.

The prior art will now be described by reference to Figure 1 which shows a birdcage resonator designed by Hayes *et al.* as referred to above, and the invention will be described by way of example only with reference to the following Figures in which:-

Figures 2a and 2b illustrate schematically a view and an end view of a four-leg coil according to the invention,

Figures 3a and 3b illustrate schematically a view and an end view of an eight-leg coil according to the invention, and

Figure 4 is a schematic diagram of an MR system.

In Figure 1, Hayes's birdcage resonator comprises two circular conducting end rings 10,12 connected by eight straight parallel conducting "legs" 14 spaced equally around each end ring. The resonator is positioned with its legs horizontal and within the horizontal circular bore 16 of a magnet in an MR system; the magnet provides either a horizontal static magnetic field  $B_{SH}$  along the axis of the bore 16, or alternatively a vertical static magnetic field  $B_{SV}$  shown by the chain line.

Optionally there may be provided sixteen capacitors 18, eight in each end ring, each capacitor positioned between the connection points of a pair of adjacent legs; such a resonator constitutes a high-pass filter. Alternatively, there may be a capacitor in each leg (not illustrated) when the resonator forms a low-pass filter; in a third option the high-pass and low-pass arrangements are combined to give a bandstop filter.

In Figure 2a, a resonator coil according to the invention comprises two circular conducting end rings 20,22 connected at equispaced positions by four conducting legs 24; the four legs curve outwards from each end ring along elliptical paths. The end view of Figure 2b shows that all the elliptical planes in which the paths lie are radial to the end rings at the points of connection with the legs 24.

In this arrangement the radio-frequency magnetic fields  $B_{R1}$  and  $B_{R2}$  generated by the coil will be radially outwards along any adjacent two of the radii to the connection points of the legs; since the coil has a four-fold symmetry, it can be operated in quadrature.

WO 96/38741

PCT/GB96/01316

There may also be provided eight capacitors 26, four in each end ring 20,22 as shown schematically. Such capacitors allow tuning of the high-pass coil. To maintain four-fold symmetry, all capacitors within each ring must be identical and the ring segments must be equal.

5 In Figure 3 an alternative coil according to the invention comprises two parallel spaced conducting end rings 30,32 connected by eight conducting legs 34 which curve outwards between the end rings along elliptical paths.

The legs are arranged in four pairs, 34A, B, C, D; the legs in each pair curve outwards along parallel elliptical paths, the planes in which the paths lie being parallel to  
10 the radius to the ring at the point midway between the connection points of each pair of legs. The directions of the r.f. magnetic fields  $B_{R3}$ ,  $B_{R4}$  may lie along any radius to the ring at a point midway between the connection points of the legs in a pair, see Figure 3b.

It is an advantage of the eight-leg version illustrated in Figure 3 that it has increased sensitivity in comparison with the four-leg version of Figure 2.

15 The eight-leg version may also be provided with eight capacitors 26 in each end ring, spaced between the connection points of the eight legs to form a high-pass filter. Alternatively, (not illustrated) there may be a capacitor in each leg 34, to provide a low-pass filter. In a third option (not illustrated) the high-pass and low-pass arrangements may be combined to form a bandstop filter.

20 It will be appreciated from Figure 3a that the conducting loops formed by adjacent legs and the end rings between those legs are not equal. The loops formed by the legs within each pair are smaller than the loops formed by one leg from each adjacent pair of legs; their effective inductances are therefore different and, in order to obtain the fundamental mode birdcage resonance, appropriate capacitor values are required for each  
25 of the two loop sizes; these values can be calculated using well known principles.

The eight-leg version of a birdcage resonator as illustrated in Figure 3 may be operated in quadrature if desired as four-fold symmetry is maintained by using appropriate capacitor values in the end rings. The direction of the field generated is preferentially along opposing larger loops, but can be changed to generation along opposing smaller loops  
30 if desired.

WO 96/38741

PCT/GB96/01316

It can be seen from Figure 3 that access for a patient or a sample is through the substantial aperture between each pair of curved legs, for example between pair 34B and 34C, or through the end rings, making it attractive for interventional MR systems. The eight-leg coil has a notably open structure, making it attractive for use as a head coil in vertical field open MR systems. Figure 3b illustrates an imaginary tubular access volume 35 and its position with respect to the legs, showing the considerable diameter of the tube.

Figure 3a illustrates the position of the coil within the horizontal bore 38 of a magnet providing a static, vertical magnetic field  $B_{SV}$ . The directions of the quadrature r.f. magnetic fields  $B_{R3}$ ,  $B_{R4}$  [see Figure 3b] will lie in the horizontal plane, either along the axis or at right angles to the axis of the bore 38.

In addition to the arrangement illustrated in Figures 2a and 3a, a birdcage according to the invention can be used for horizontal field MR applications. However, the birdcage resonator can then operate only in the linear mode as opposed to the quadrature mode. If the purpose of the MR scan is to allow intervention on the patient, then the open access structure can be advantageous.

In Figure 4, an MR imaging system comprises a magnet having an aperture 50 within which is located a birdcage resonator 52 according to the invention connected to a transmitter 54 supplied from a control computer 56, and to a receiver 58. The receiver is connected through a digitiser 60 to the computer 56.

The magnet aperture 50 also houses conventional gradient coils 62 supplied by a gradient amplifier 64 also controlled by the computer 56. The system has an operating console 66 having typical features such as the cathode ray tube 68, keyboard 70, function buttons 72 and trackball 74, all connected to the computer 56 which also controls a multi-format camera 76 and magnetic tape unit 78.

In operation, the magnet and the gradient coils 62 apply a static magnetic field to a sample/patient located within the magnet aperture 50 and between the coils 62. The transmitter 54 applies a pulse signal at the appropriate radio-frequency to the birdcage resonator 52; the resonator also receives from the sample or patient a signal relating to

**WO 96/38741****PCT/GB96/01316**

precession of e.g. protons in the sample/patient, and this signal is transferred through the receiver 58 and digitiser 60 to the computer. By use of the appropriate, conventional controls, an image of the sample/patient in a required format is provided.

By use of a magnetic coil according to the invention and selected to operate in  
5 quadrature, dual frequency MR measurements can be made, for example at 34.75 MHz and 85.81 MHz for phosphorus and proton resonances. Alternatively, the coil can be selected to perform field cycled proton-electron double resonance imaging (FC-PEDRI).

If the birdcage resonator according to the invention is intended for low field applications, for example less than 0.1 T, then very large capacitors may be needed to tune  
10 the coil at low frequencies, for example 1 MHz to 10 MHz. In such situations, the use of integral capacitors may improve the efficiency of the coil.

WO 96/38741

PCT/GB96/01316

CLAIMS




1. A magnetic coil characterised by a pair of parallel conducting end rings (20,22), and connected between the end rings a number N of conductors (24) spaced around the end rings at intervals of  $2\pi\frac{1}{N}$ , the conductors curving outwards between the end rings  
5 along elliptical paths.
2. A magnetic coil according to Claim 1 in which the planes in which the elliptical paths of the conductors (24) lie are radial to the end rings (20,22).
3. A magnetic coil according to Claim 2 in which there are four conductors (24) spaced at 90° intervals around the end rings (20,22).
- 10 4. A magnetic coil according to Claim 1 in which the conductors (34) are associated in pairs (34A, B, C, D), each pair of conductors curving outwards from the end rings (20,22) along parallel elliptical paths, the planes in which the elliptical paths lie being parallel to the radius to each end ring intermediate between the connection points of that pair of conductors to the ring.
- 15 5. A magnetic coil according to Claim 4 in which there are eight conductors (34) arranged as four pairs (34A, B, C, D), the pairs being equispaced around the end rings (30,32).
6. A magnetic coil according to any preceding claim in which there is further provided a number N of capacitors (26) in each end ring (20,22), connected between adjacent  
20 conductors (24) whereby a high-pass birdcage resonator is provided.
7. A magnetic coil according to any one of Claims 1 to 5 in which there is further provided a number N of capacitors connected one in each conductor of the magnetic coil, whereby a low-pass birdcage-type resonator is provided.
8. A magnetic coil according to any one of Claims 1 to 5 in which there are  
25 N capacitors (26) in each end ring (20,22), connected between adjacent conductors (24), and there are a further N capacitors connected one in each conductor (24), whereby a bandstop birdcage-type resonator is provided.
9. A magnetic resonance system characterised by a magnet having a horizontal bore (38) and providing a static vertical magnetic field ( $B_{SV}$ ), and a magnetic coil (52) according  
30 to any one of Claims 1 to 8 arranged with its end rings in horizontal planes within the horizontal bore.

**WO 96/38741****PCT/GB96/01316**

10. A magnetic resonance system according to Claim 9 in which the magnetic coil (52) is connected to a transmitter (54) and to a receiver (58), the transmitter and receiver being connected to a control computer (56); and further comprising gradient coils (62) supplied by a gradient amplifier (64); and an operating console (66).

WO 96/38741

PCT/GB96/01316

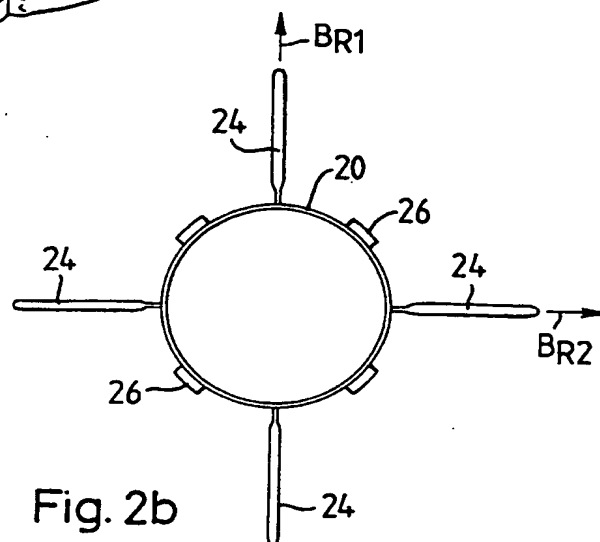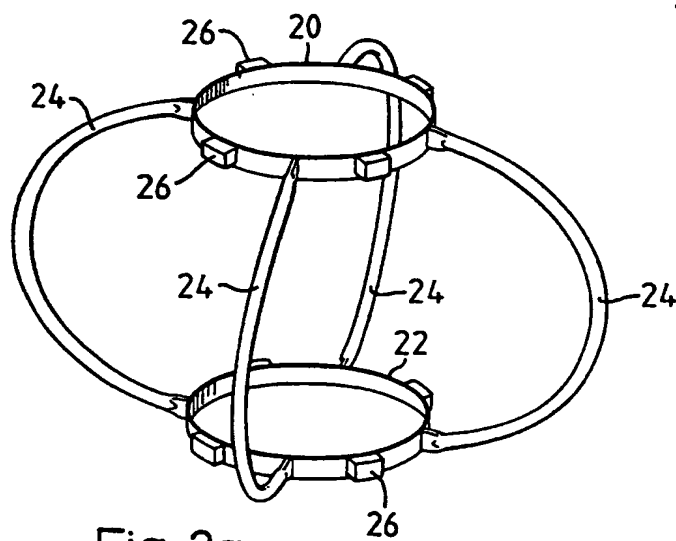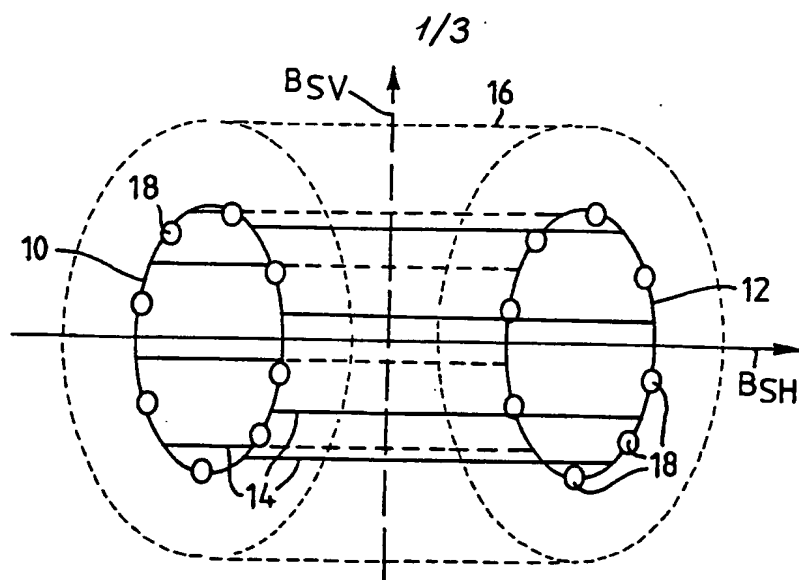

WO 96/38741

PCT/GB96/01316

2/3

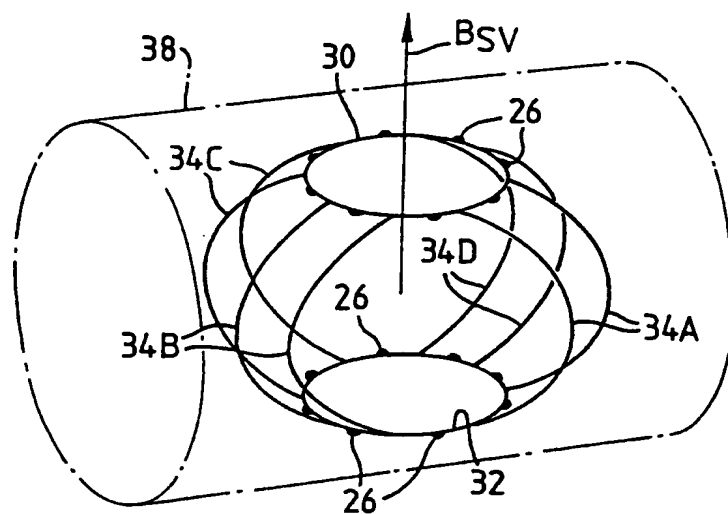


Fig. 3a

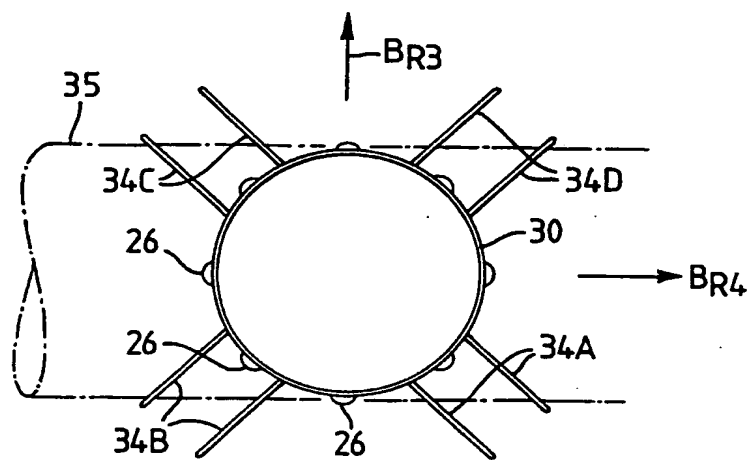


Fig. 3b

WO 96/38741

PCT/GB96/01316

3/3

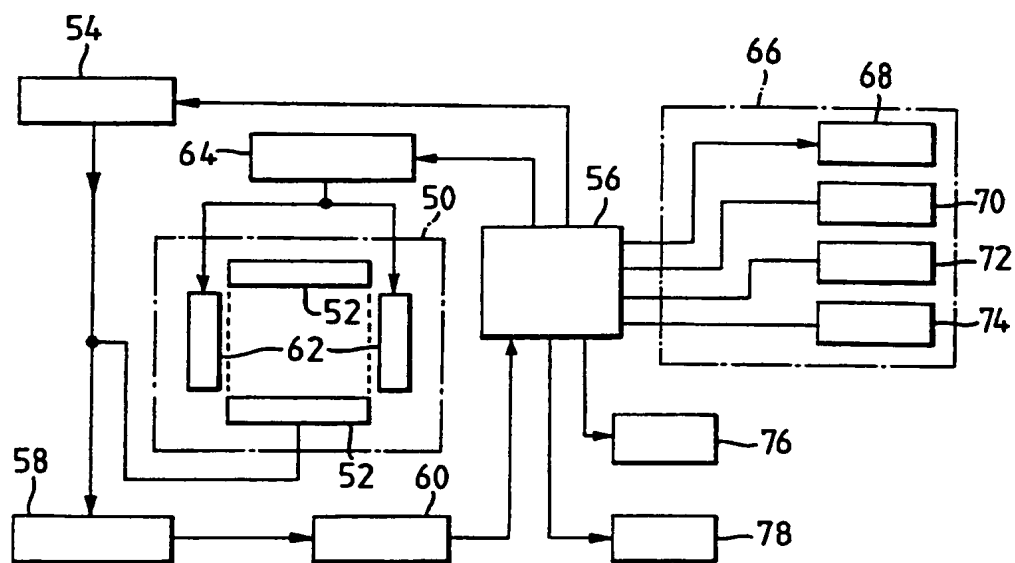


Fig. 4

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 96/01316

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 G01R33/34

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 G01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,4 837 515 (S. NISHIHARA ET AL.) 6 June 1989 see abstract see column 4, line 38 - column 5, line 14; figures 2-4 ---	1,9
A	DE,A,33 47 597 (PHILIPS PATENTVERWALTUNG) 18 July 1985 see abstract see page 35, line 31 - page 36, line 23 see page 48, line 7 - line 12; figure 15 ---	1-4,9
A	US,A,5 372 137 (E.C. WONG ET AL.) 13 December 1994 see column 2, line 60 - column 3, line 10 see column 5, line 54 - column 6, line 55; figure 3 --- -/--	1,9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

24 July 1996

Date of mailing of the international search report

31.07.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31.651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Horak, G

## INTERNATIONAL SEARCH REPORT

Int: nal Application No

PCT/GB 96/01316

C(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE,A,36 16 706 (SIEMENS AG) 26 November 1987 see abstract see column 6, line 34 - column 7, line 9; figures 1,3 ---	1,9
A	EP,A,0 133 364 (NATIONAL RESEARCH DEVELOPMENT CORPORATION) 20 February 1985 cited in the application see abstract see page 2, line 14 - page 4, line 19 ---	1,9
A	JOURNAL OF MAGNETIC RESONANCE, vol. 94, no. 3, 1 October 1991, DULUTH, MN, US, pages 550-556, XP000235341 M.D. HARPEN: "THE SPHERICAL BIRDCAGE RESONATOR" see the whole document -----	1,9

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/GB 96/01316

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4837515	06-06-89	JP-A- 63082639	13-04-88
DE-A-3347597	18-07-85	EP-A- 0156042	02-10-85
		JP-A- 60158341	19-08-85
		US-A- 4712067	08-12-87
US-A-5372137	13-12-94	US-A- 5474069	12-12-95
DE-A-3616706	26-11-87	NONE	
EP-A-0133364	20-02-85	GB-A,B 2144918	13-03-85
		JP-C- 1792148	14-10-93
		JP-B- 5001605	08-01-93
		JP-A- 60057602	03-04-85
		US-A- 4652825	24-03-87